



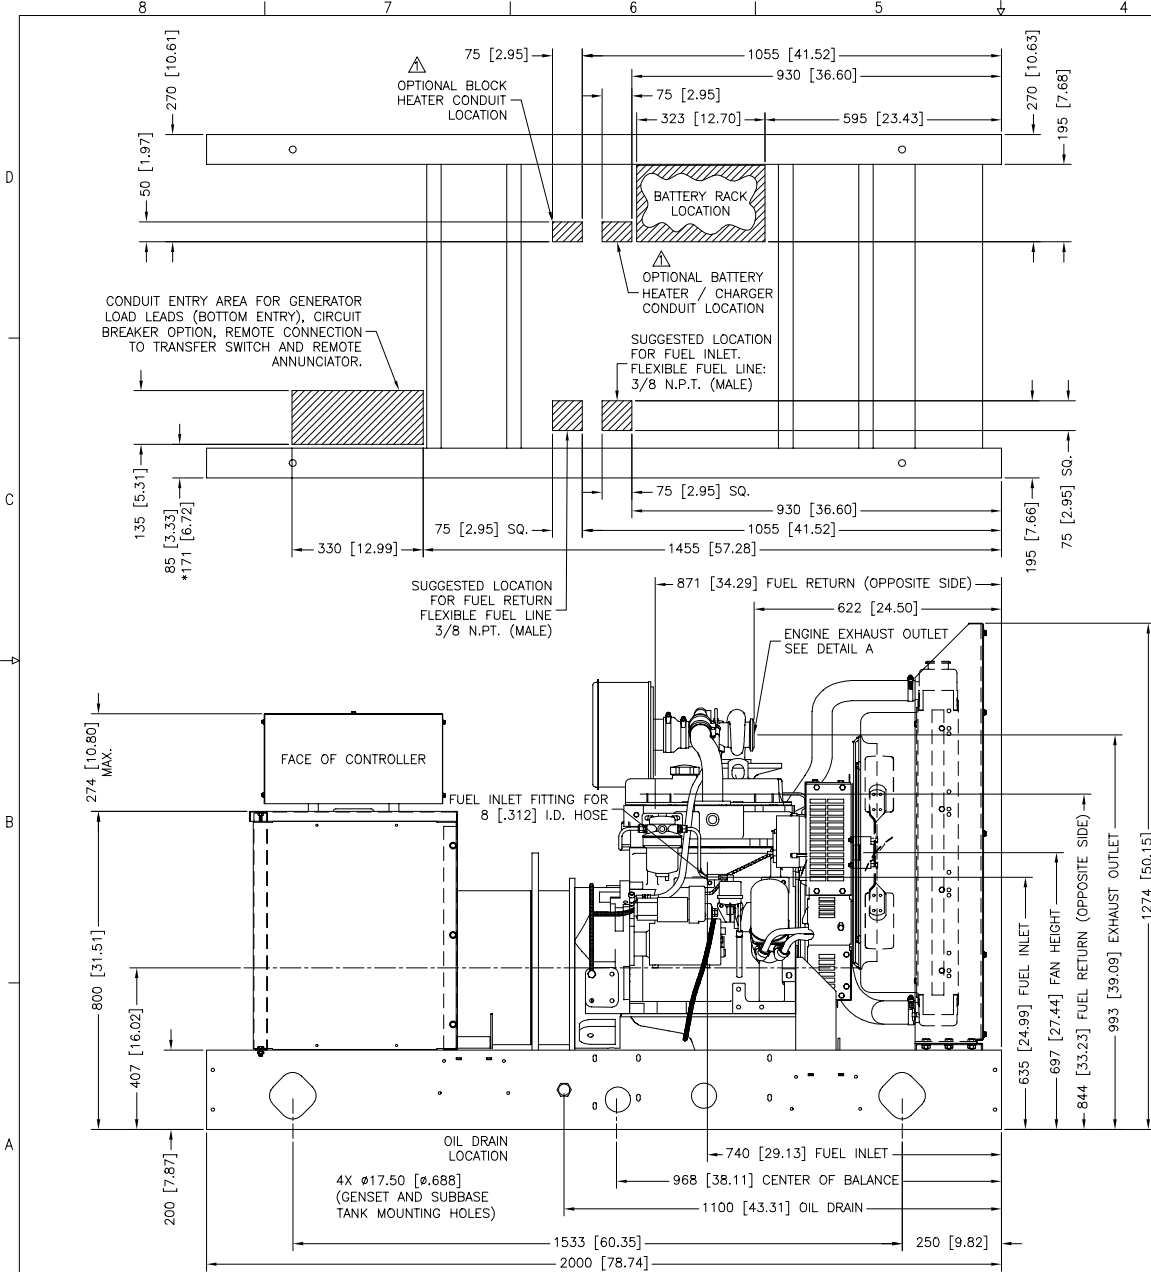

INSTALLATION NOTE
 IF SUBBASE FUEL TANK AND/OR SOUND HOUSING IS USED, REFER TO SUBBASE FUEL TANK ADV TO DETERMINE MOUNTING LOCATIONS.



MODEL	GENSET WEIGHT (WET)
20 4P4, 4Q4	680 KG [1500 LBS]
30 4Q4	
30 4P5	696 KG [1535 LBS]
40 4P7, 4P8, 4Q10	757 KG [1670 LBS]

*-ASTERISK DENOTES 1040 [40.9] SKID WIDTH.

ENCLOSURES AVAILABLE WITH 1040 [40.9] SKID WIDTH ONLY.

NOTES:
 1) WHEN SUBBASE TANK IS USED, CONDUIT MUST BE LOCATED OUTSIDE OF TANK AREA OR IN STUB-UP AREA FOR SUBBASE TANK. REFER TO SUBBASE ADV.

2) DIMENSIONS IN [] ARE ENGLISH EQUIVALENTS.

3) IF AN ENCLOSURE IS USED THE FUEL LINE MUST BE STUBBED UP FROM DIRECTLY UNDER THE UNIT OR BROUGHT IN FROM THE END OF THE SKID. REFER TO ENCLOSURE ADV.

METRIC CAD FILE



20 MODEL, 4P4
30 MODEL, 4P5/4Q4
40 MODEL, 4P7, 4P8, 4Q10
RECONNECTABLE
IMPROVED MOTOR STARTING (IMS)
600V & 1 PHASE ALTERNATORS
3029TF JOHN DEERE

UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: X.XX ± .XX X ± .5 X ± .1 ANGLES ± .5		SURFACE FINISH X ± .5 X ± .1 X ± .05	
DATE	DATE	DATE	DATE
APPROVED	DATE	DATE	DATE
CHECKED	DATE	DATE	DATE
APPROVED	DATE	DATE	DATE

POWER SYSTEMS, KOHLER CO.
 THIS DRAWING, IN DESIGN AND TOTAL, IS KOHLER CO. PROPERTY AND MUST NOT BE USED WITHOUT THE WRITTEN PERMISSION OF KOHLER CO. WORK.
 ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

KOHLER CO.
ADV6623A.DWG
1-3
ADV-6623

REV	DATE	REVISION	BY
F	12-16-02	SEE SHEET 1 & 3 OF 3. [68636]	RAC
G	4-28-03	(D-3) 305 WAS 451, (C-2) 1104 WAS 1043. [68412]	RAC
H	11-11-03	(B-6) CITY WATER COOLING REMOVED. [70918]	RAC
J	12-8-03	SEE SHEET 1 [71067]	SAM
K	4-5-05	SEE SHEET 1 [72348]	SAM
L	4-3-06	SEE SHEET 3 [75122]	SAM
M	9-7-05	(A-1) SUBBASE TANK REMOVED FROM 1040 SKID NOTE [77738]	SAM

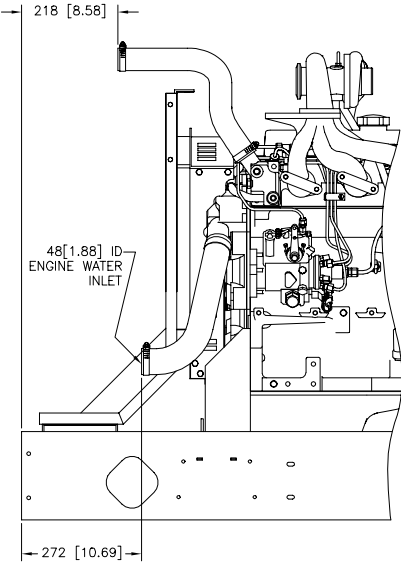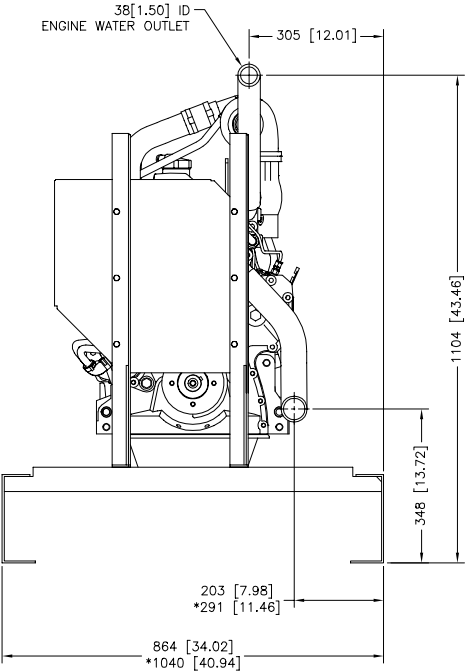

REMOTE RADIATOR SETUP

*--ASTERISK DENOTES 1040 [40.9] SKID WIDTH.

ENCLOSURES AVAILABLE WITH 1040 [40.9] SKID WIDTH ONLY.

NOTES:
1) DIMENSIONS IN [] ARE ENGLISH EQUIVALENTS.

METRIC CAD FILE

20 MODEL, 4P4
30 MODEL, 4P5/4Q4
40 MODEL, 4P7, 4P8, 4Q10
RECONNECTABLE
IMPROVED MOTOR STARTING (IMS) RECONNECTABLE
600V & 1 PHASE ALTERNATORS
3029TF JOHN DEERE

UNLESS OTHERWISE SPECIFIED:
1) DIMENSIONS ARE IN MILLIMETERS
2) TOLERANCES ARE:
X.X ± SURFACE FINISH
X.X ± MAX.
X ± MAX.
ANGLES ±


THIS DRAWING IS THE PROPERTY OF KOHLER CO. PROPERTY AND NOT BE USED WITHOUT THE WRITTEN PERMISSION OF KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

KOHLER CO.
POWER SYSTEMS, KOHLER, WI 53044 U.S.A.
THIS DRAWING IS THE PROPERTY OF KOHLER CO. PROPERTY AND NOT BE USED WITHOUT THE WRITTEN PERMISSION OF KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.


DIMENSION PRINT

APPROVED	DATE	TITLE
DRAWN	DATE	SCALE
CHECKED	DATE	SHEET
APPROVED	DATE	


ADV-6623

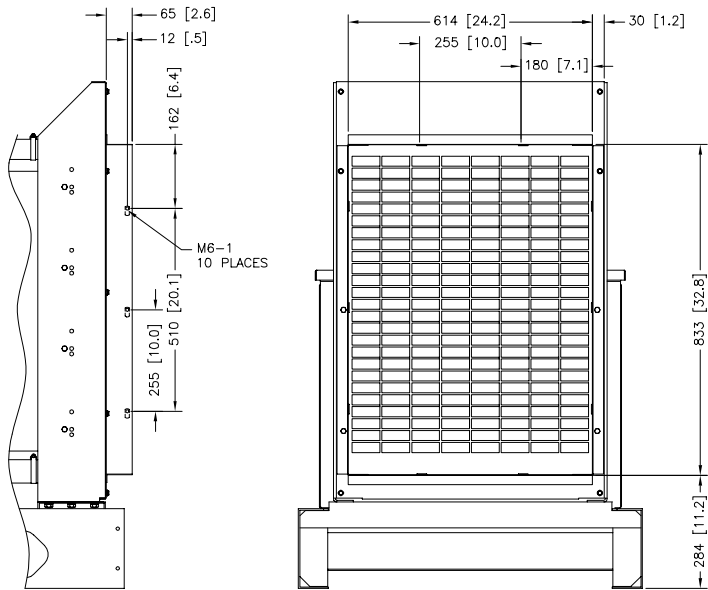

RADIATOR DUCT FLANGE

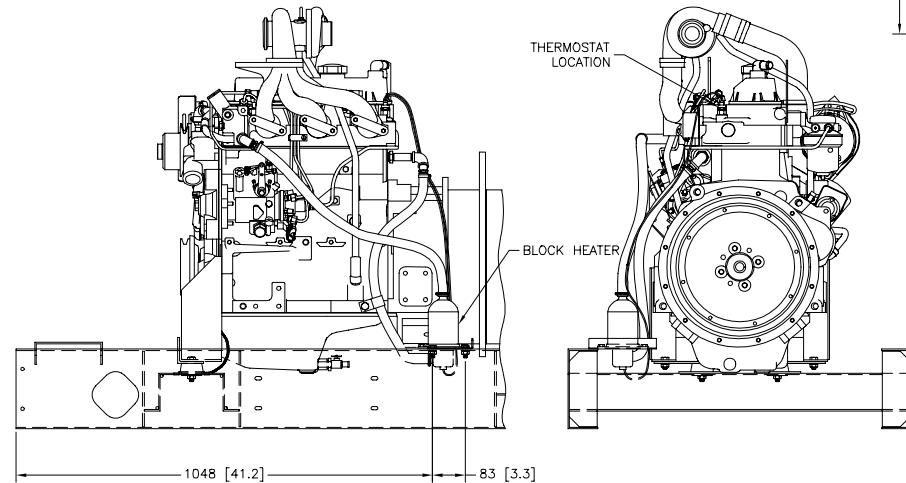

BLOCK HEATER
120 AND 240 VOLT

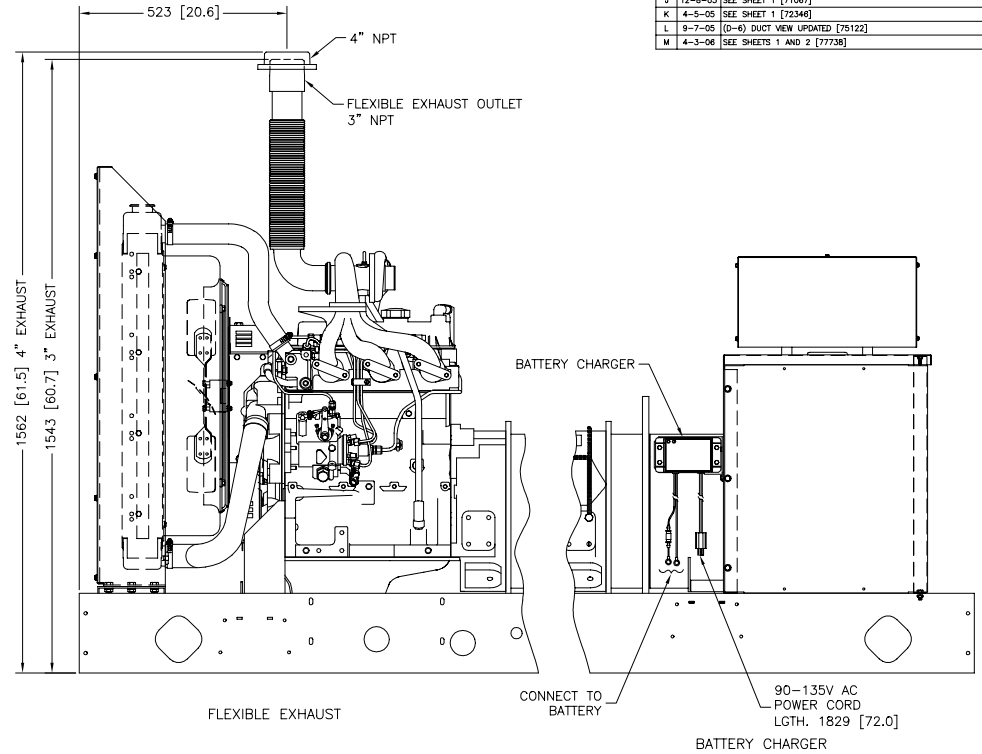

METRIC CAD FILE

NOTE: DIMENSIONS IN [] ARE ENGLISH EQUIVALENTS.

20 MODEL, 4P4
30 MODEL, 4P5/4Q4
40 MODEL, 4P7, 4P8, 4Q10
RECONNECTABLE
IMPROVED MOTOR STARTING (IMS) RECONNECTABLE
600V & 1 PHASE ALTERNATORS
3029TF JOHN DEERE

UNLESS OTHERWISE SPECIFIED: (1) DIMENSIONS ARE IN MILLIMETERS (2) TOLERANCES ARE: X.X ± .5 X.XX ± .25 ANGLES ± .5		SURFACE FINISH ✓ MAX.	
APPROVED: [Signature]		DATE	
DRAWN: BTW		DATE: 4-25-01	
CHECKED: CWF		DATE: 5-31-01	
APPROVED: CWF		DATE: 5-31-01	
TITLE: DIMENSION PRINT		SCALE: 1:1X	
SHEET: 3-3		DWG NO: ADV6623C.DWG	
PLOT DATE		ADV-6623	